



DATA SHEET – MwStop® CHECK VALVE

Technical Data - PE-Housing


Article no.	Mw200-45-PE	soft-membrane
	Mw200-55-PE	std-membrane
	Mw200-65-PE	hard-membrane

DN	200 mm
Diameter	200 mm
Length	400 mm
Material case	PE (Polyethylen)
Material membrane	EPDM
Material fastening bracket	EN 1.4404/ AISI 316L



	soft-membrane	std-membrane	hard-membrane
max. backflow pressure	3 m H ₂ O(0,3bar)	5 m H ₂ O (0,5bar)	8 m H ₂ O (0,8bar)
Horizontal opening pressure	189 mm H ₂ O	199 mm H ₂ O	225 mm H ₂ O
Horizontal closing pressure	99 mm H ₂ O	104 mm H ₂ O	119 mm H ₂ O

max. flow velocity	2m/s
	Fitting for higher flow velocity on request

Membranes are hydrogen sulfide (H₂S) resistant

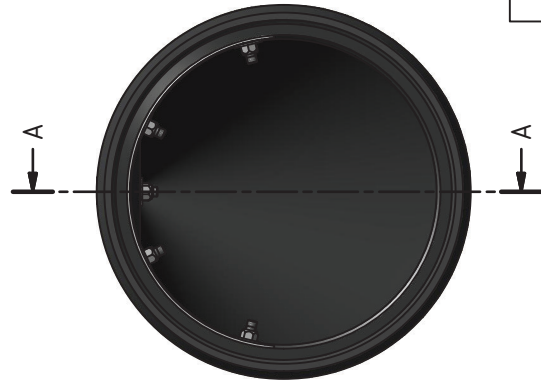

A-A (1:2)

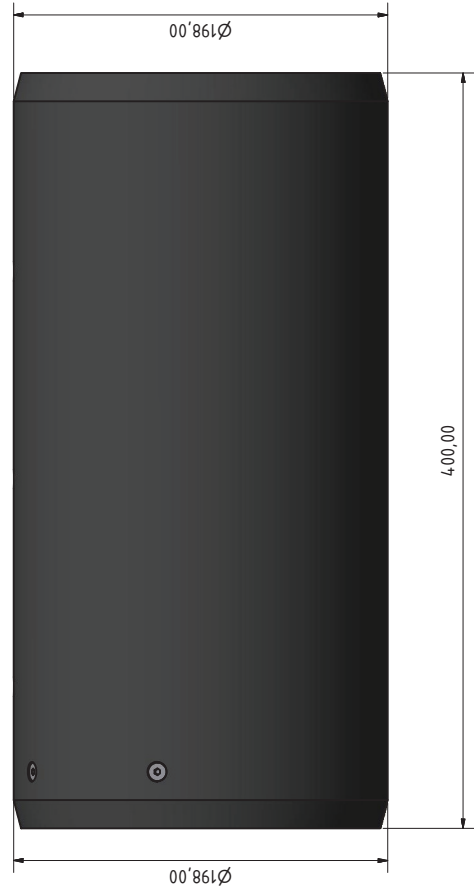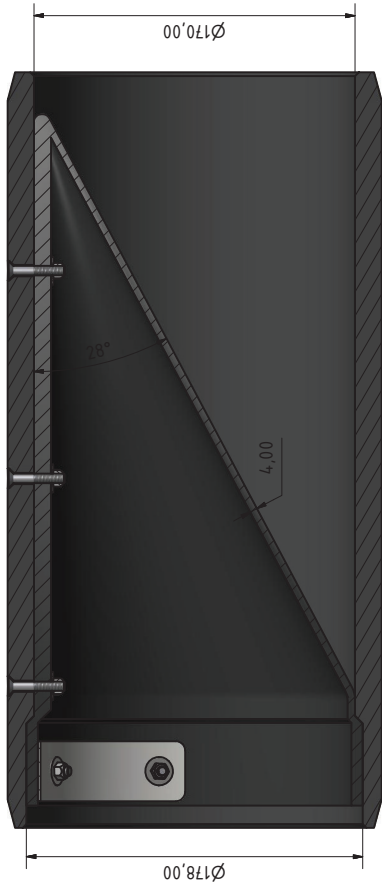

ANSICHT1 (1:2)

MTA Water Products GmbH		Date: 02.02.2019		Name: Winfried Tafelner		Projekt: MwStop		Maßstab 1:2	
02	Material: DN200_181	01	Material: DN200_181	02	Material: DN200_181	DN200_181 Assembly PE		1	
Gewicht: 1		Gewicht: 1		Gewicht: 1		Baugruppe: DN200_181		A2	