



DATA SHEET – MwStop® CHECK VALVE

Technical Data - Standard-Housing




Article no.	Mw885-45-3std	soft-membrane	
	Mw885-55-3std	std-membrane	
	Mw885-65-3std	hard-membrane	
DN	900		
Diameter	885		
Length	1780 mm		
Range of application	Ø 886 - 913 mm		
Material case	EN 1.4404/AISI 316L		
Material membrane	EPDM		
Material fastening bracket	EN 1.4404/AISI 316L		
	soft-membrane	std-membrane	hard-membrane
max. backflow pressure	3 m H ₂ O (0,3bar)	5 m H ₂ O (0,5bar)	8 m H ₂ O (0,8bar)
Horizontal opening pressure	354 mm H ₂ O	409 mm H ₂ O	459 mm H ₂ O
Horizontal closing pressure	234 mm H ₂ O	269 mm H ₂ O	299 mm H ₂ O
max. flow velocity	4 m/s	Fitting for higher flow velocity on request	

Membranes are hydrogen sulfide (H₂S) resistant

General distribution: MTA Messtechnik GmbH

This drawing shows the layout and the limits and figures of the frame MTA Waterproducts GmbH and shall not be used for any other purpose without the written consent of the company MTA Waterproducts GmbH. Without explicit written agreement, this may not be handed over to third parties or legal entities, neither may it be reproduced, used or copied. (Unauthorized use of this document is not permitted and will be prosecuted by law. (All rights reserved))

MTA Waterproducts GmbH		Projekt: MwStop		Maßstab: 1:5	
Druck	1:01	Nr. des	1	A1	
Datum	13.02.2015	Verfasser	DN900 Assembly	2	
Ausgegeben	13.02.2015	Überprüfer		3	
Bauteil		Baugruppe: DN900		4	
Material		Gewicht:		5	
1:01		1		6	
1:01		1		7	
1:01		1		8	
1:01		1		9	
1:01		1		10	
1:01		1		11	
1:01		1		12	

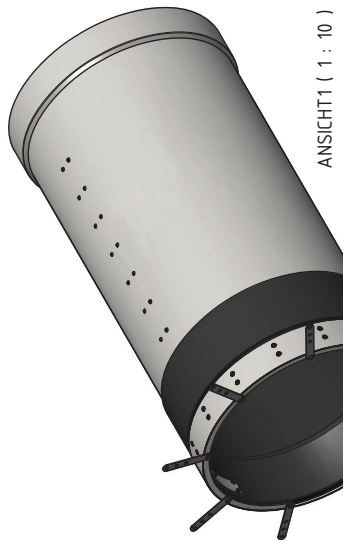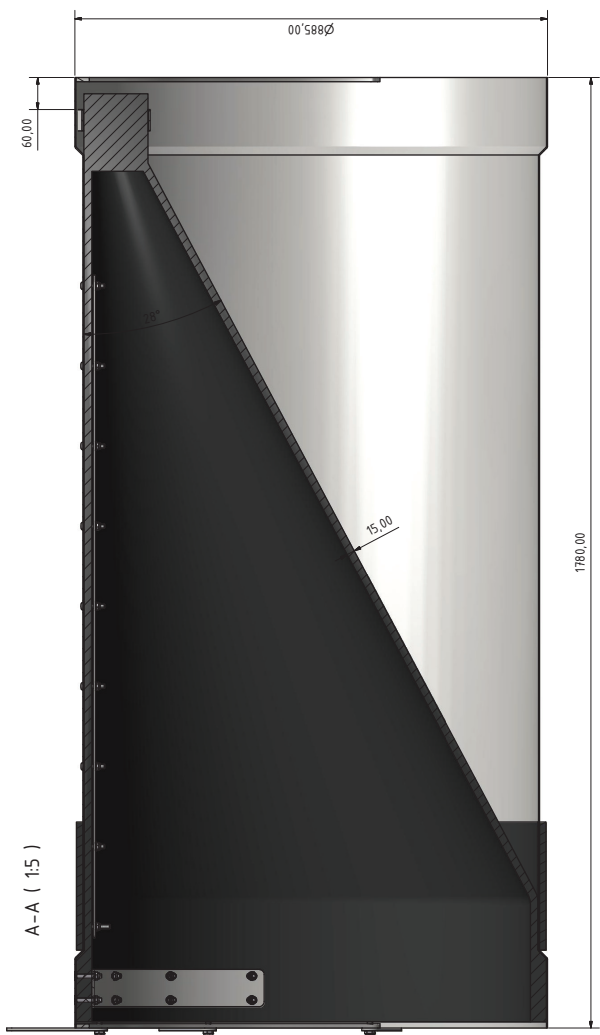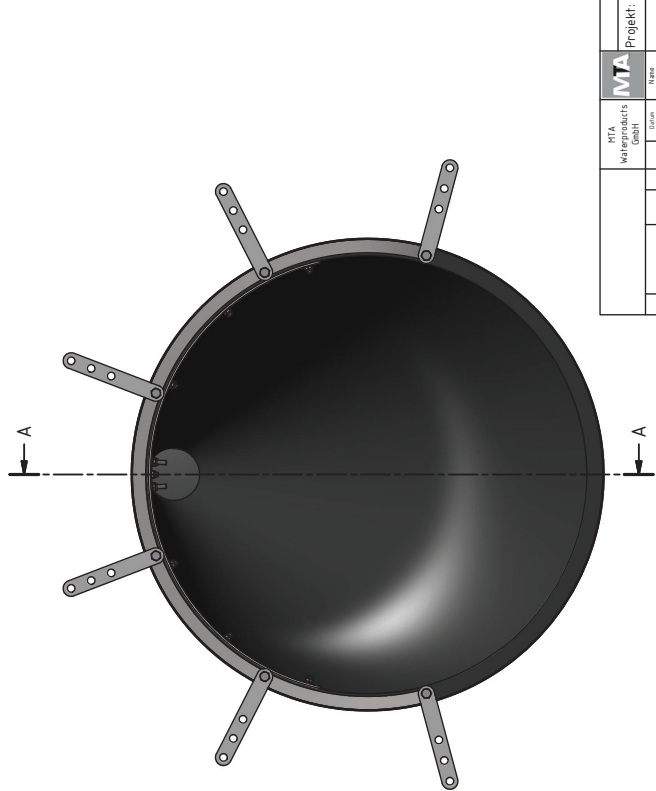

H G F E D C B A

1 2 3 4 5 6 7 8 9 10 11 12

1 2 3 4 5 6 7 8 9 10 11 12